

ebm-papst ventilator (Shanghai)Co.,Ltd.

No.418, Hua jing Road, Wai Gao qiao Free Trade Zone, Pudong

Tel: +86(0)21-50460183

www.ebmpapst.com

## Nominal data


|                          |                   |      |
|--------------------------|-------------------|------|
| Type                     | R2E140-BO10-22    |      |
| Motor                    | M2E068-CA         |      |
| Phase                    |                   | 1~   |
| Nominal voltage          | VAC               | 230  |
| Frequency                | Hz                | 50   |
| Method of obtaining data |                   | fa   |
| Speed (rpm)              | min <sup>-1</sup> | 1850 |
| Power consumption        | W                 | 140  |
| Current draw             | A                 | 0.63 |
| Capacitor                | μF                | 2    |
| Capacitor voltage        | VDB               | 450  |
| Min. ambient temperature | °C                | -25  |
| Max. ambient temperature | °C                | 45   |

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · oe = Customer equipment  
Subject to change

## Technical description


|                                                                            |                                                              |
|----------------------------------------------------------------------------|--------------------------------------------------------------|
| Weight                                                                     | 1.4 kg                                                       |
| Fan size                                                                   | 140 mm                                                       |
| Impeller material                                                          | plastic                                                      |
| Direction of rotation                                                      | Clockwise, viewed toward rotor                               |
| Degree of protection                                                       | IP44; installation- and position-dependent as per EN 60034-5 |
| Insulation class                                                           | "B"                                                          |
| Moisture (F) / Environmental (H) protection class                          | F1-1                                                         |
| Max. permitted ambient temp. for motor (transport/storage)                 | + 80 °C                                                      |
| Min. permitted ambient temp. for motor (transport/storage)                 | - 40 °C                                                      |
| Installation position                                                      | any                                                          |
| Mode                                                                       | S1                                                           |
| Motor bearing                                                              | Ball bearing                                                 |
| Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system) | < 0.75 mA                                                    |
| Motor protection                                                           | Thermal overload protector (TOP) wired internally            |
| With cable                                                                 | Variable                                                     |
| Protection class                                                           | I (with customer connection of protective earth)             |
| Approval                                                                   | CCC                                                          |

Product drawing

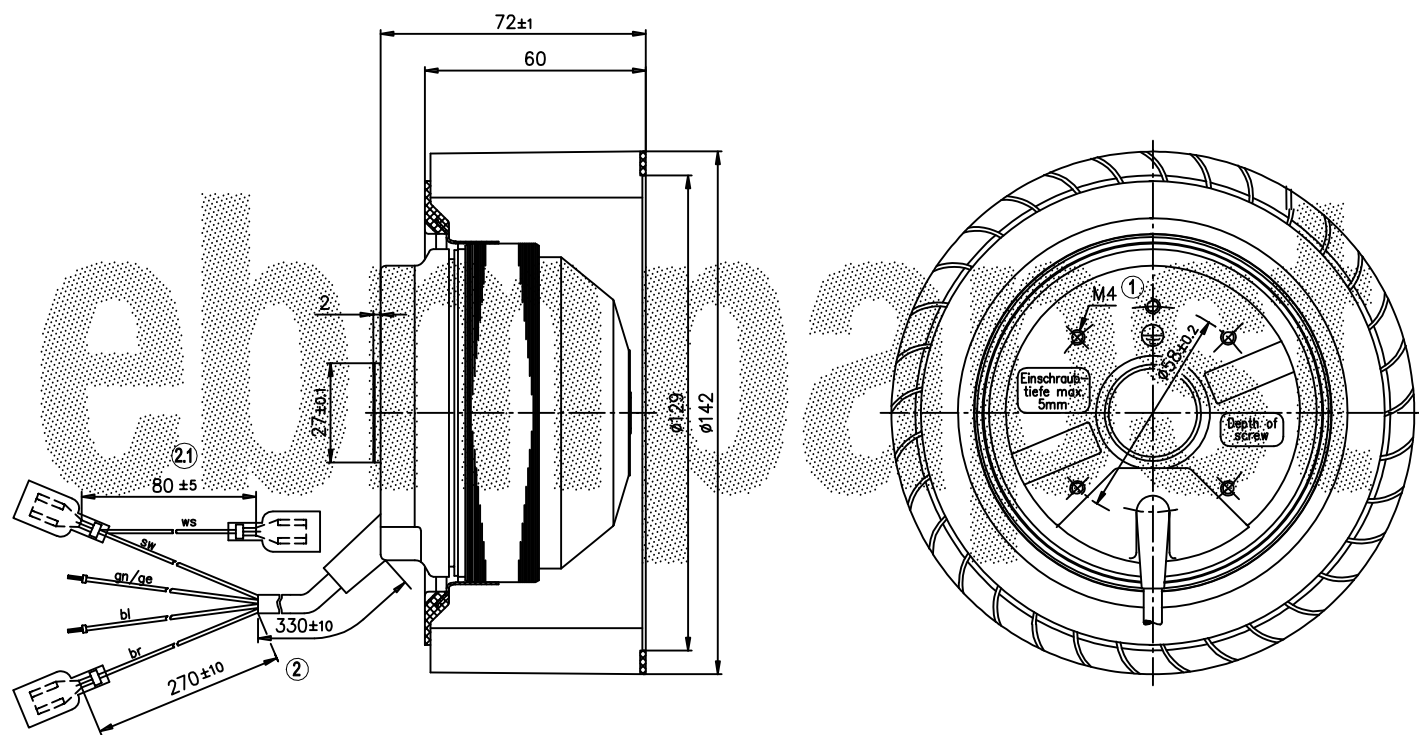

|     |                                                                                                                                                                   |
|-----|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1   | Max. clearance for screw 5 mm                                                                                                                                     |
| 2   | Cable PVC 4G 0.5 mm², 2x wire-end ferrule (925552-1), 1x flat push-on receptacle 6.3 - 0.8 (160389-3), 1x flat push-on receptacle 6.3 - 0.8 (3-160256-1) crimped. |
| 2.1 | Wire AWG 20-300V, flat push-on receptacle 6.3 - 0.8 (160389-3)                                                                                                    |


Connection diagram

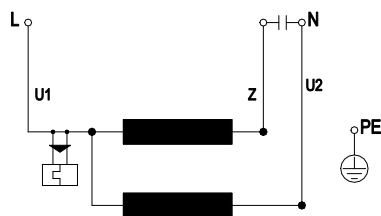

|    |              |   |       |    |       |
|----|--------------|---|-------|----|-------|
| U1 | blue         | Z | brown | U2 | black |
| PE | green/yellow |   |       |    |       |



Curves: Air performance 50 Hz

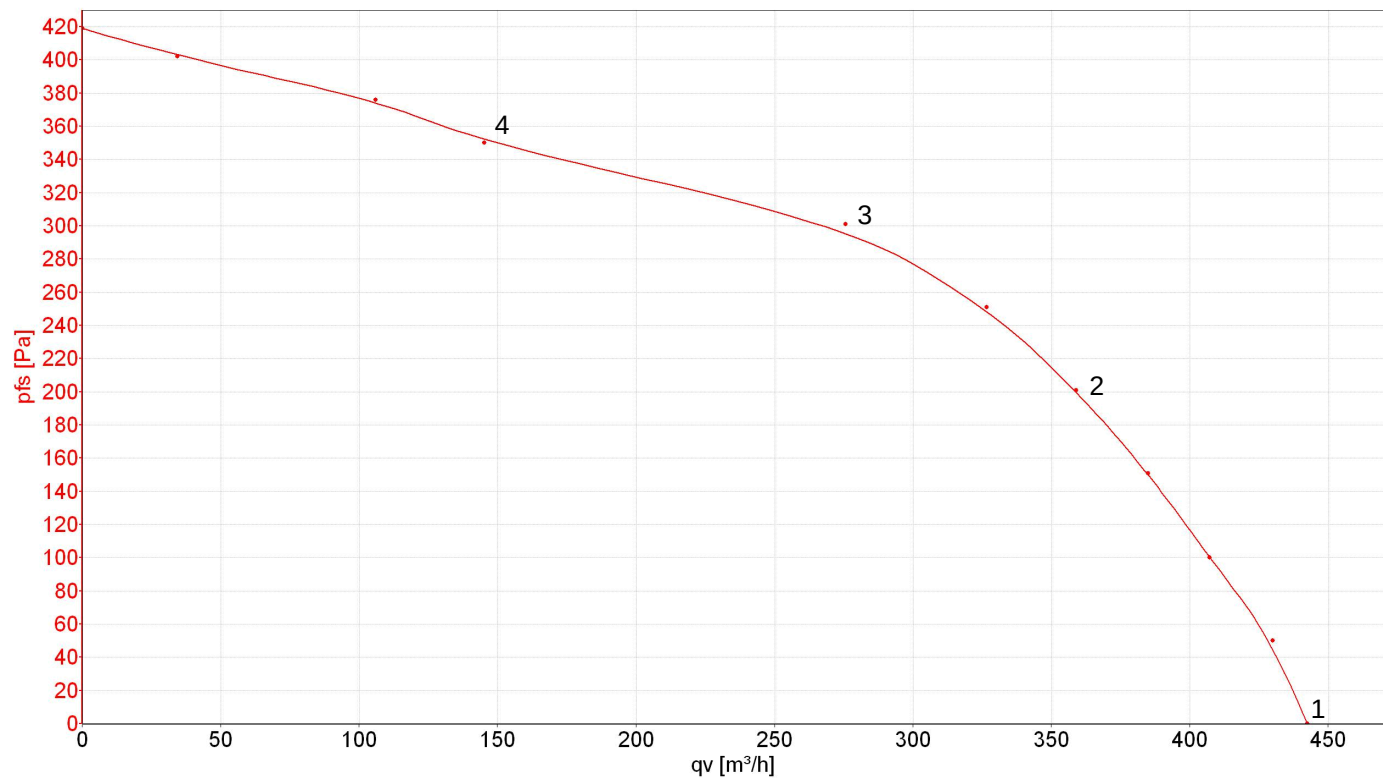

Measured values

|   | U   | f  | n                 | P <sub>e</sub> | I    | qv   | p <sub>fs</sub> |
|---|-----|----|-------------------|----------------|------|------|-----------------|
|   | V   | Hz | min <sup>-1</sup> | W              | A    | m³/h | Pa              |
| 1 | 230 | 50 | 1850              | 140            | 0.63 | 442  | 0               |
| 2 | 230 | 50 | 2245              | 120            | 0.54 | 359  | 201             |
| 3 | 230 | 50 | 2440              | 104            | 0.48 | 276  | 301             |
| 4 | 230 | 50 | 2655              | 88             | 0.45 | 145  | 350             |

U = Supply voltage · f = Frequency · n = Speed · P<sub>e</sub> = Power input · I = Current draw · qv = Air flow · p<sub>fs</sub> = Pressure increase

